

## General Safety Information

### WARNING

- Obtain and read the service instructions carefully prior to installing the parts. Loose, worn, or damaged parts may cause injury to the rider. We strongly recommend only using genuine Shimano replacement parts.
- Read these Technical Service Instructions carefully, and keep them in a safe place for later reference.

### Note

- For smooth operation, use the specified outer casing and bottom bracket cable guide.
- Grease the inner cable and the inside of the outer casing before use to ensure that they slide properly.
- Use a frame with internal cable routing is strongly discouraged as it has tendencies to impair the SIS shifting function due to its high cable resistance.
- Operation of the levers related to gear shifting should be made only when the front chainwheel is turning.
- Use an outer casing which still has some length to spare even when the handlebars are turned all the way to both sides. Furthermore, check that the shifting lever does not touch the bicycle frame when the handlebars are turned all the way.
- A special grease is used for the gear shifting cable (SIS-SP41). Do not use DURA-ACE grease or other types of grease, otherwise they may cause deterioration in gear shifting performance.
- Do not disassemble the indicator and shifting lever unit, as this may damage them or cause mis-operation.
- Parts are not guaranteed against natural wear or deterioration resulting from normal use.
- For maximum performance we highly recommend Shimano lubricants and maintenance products.
- For any questions regarding methods of installation, adjustment, maintenance or operation, please contact a professional bicycle dealer.

## Technical Service Instructions

SI-6FH0C

SL-R440  
SL-R441

Shifting lever

In order to realize the best performance, we recommend that the following combination be used.

Shifting lever	F : SL-R441	R : SL-R440
Outer casing	SP41	
Gears	18	
Front derailleur	FD-R440 / FD-R450	
Front chainwheel	FC-4401 / FC-4500 / FC-4550	
Bottom bracket	BB-ES51/30 / SM-FC4500	
Rear derailleur	RD-4400 / RD-4500	
Freehub	FH-4400 / FH-4500	
Cassette sprocket	CS-HG50-9	
Chain	CN-HG53	
Bottom bracket cable guide	SM-SP17	

Shifting lever	F : SL-R441	R : SL-R440
Outer casing	SP41	
Gears	27	
Front derailleur	FD-R443 / FD-R453	
Front chainwheel	FC-4404 / FC-4503	
Bottom bracket	BB-ES51/30 / SM-FC4500	
Rear derailleur	RD-4400 / RD-4500	
Freehub	FH-4400 / FH-4500	
Cassette sprocket	CS-HG50-9	
Chain	CN-HG53	
Bottom bracket cable guide	SM-SP17	

This service instruction explains how to use and maintain the Shimano bicycle parts which have been used on your new bicycle. For any questions regarding your bicycle or other matters which are not related to Shimano parts, please contact the place of purchase or the bicycle manufacturer.

These service instructions are printed on recycled paper.

**SHIMANO**

SHIMANO AMERICAN CORPORATION  
One Holland, Irvine, California 92618, U.S.A. Phone: +1-949-951-5003

SHIMANO EUROPE B.V.  
Industrieweg 24, 8071 CT Nunspeet, The Netherlands Phone: +31-341-272222  
SHIMANO INC.  
3-7-7 Oimatsu-cho Sakai-ku, Sakai, Osaka 590-8577, Japan  
Please note: specifications are subject to change for improvement without notice. (English)  
© Apr. 2006 by Shimano Inc. XBC SZK Printed in Japan.

## Mounting the shifting lever

Use a handlebar grip with a maximum outer diameter of 32 mm.

Install the brake lever in a position where it will not obstruct brake operation. Do not use in a combination which causes brake operation to be obstructed.

Tightening torque :  
5 N·m {44 in. lbs.}

## Gear shifting operation

Both lever (A) and lever (B) always return to the initial position when they are released after shifting. When operating one of the levers, always be sure to turn the crank arm at the same time.


< Front >

### To shift from a small chainring to a larger chainring

When lever (A) is pressed once, there is a shift of one step from a small chainring to a larger chainring.

Example:

from intermediate chainring to largest chainring.




### To shift from a large chainring to a smaller chainring


When lever (B) is pressed once, there is a shift of one step from a large chainring to a smaller chainring.

Example:

from largest chainring to intermediate chainring.




When lever (B) is operated, there is one click where trimming (the noise prevention mechanism) engages, and a second stronger click when the gear shift stroke is completed. After trimming, the next push will complete the gear shift stroke.




### Trimming (noise prevention operation)


If the chain is on the large front chainwheel and the larger rear sprocket, the chain will rub in the front derailleur plate, producing a characteristic noise. When this happens, press lever (B) lightly (to the point where it clicks); this causes the front derailleur to move slightly towards the smaller chainwheel, thereby eliminating the noise.

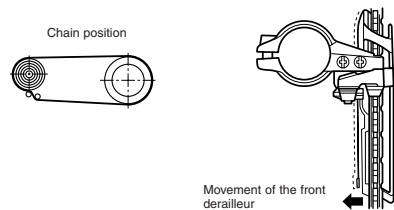

< Front >



< Rear >



< Rear >

### To shift from a small sprocket to a larger sprocket


To shift one step only, press lever (A) to the ① position.

To shift two steps at one time, press to the ② position.

① : Shifts one sprocket  
E.x. : from 3rd to 4th

② : Quick-shifts two sprockets  
E.x. : from 3rd to 5th


③ : Quick-shifts three sprockets  
E.x. : from 3rd to 6th



### To shift from a large sprocket to a smaller sprocket

Press lever (B) once to shift one step from a larger to a smaller sprocket.

E.x. : from 4th to 3rd




## Installing the shifting cable

### Cutting the outer casing

When cutting the outer casing, cut the opposite end to the end with the marking. After cutting the outer casing, make the end round so that the inside of the hole has a uniform diameter.

Attach the same outer end cap to the cut end of the outer casing.



## Replacement of the shifting lever unit and indicator

< Front >

### Removal of the indicator


Disassembly and reassembly should only be carried out when replacing the indicator.

- Remove the two indicator set screws which are securing the indicator.


Tightening torque : 0.3 - 0.5 N·m {3 - 4 in. lbs.}

- Remove the indicator unit as shown in the illustration.

- Operate lever (B) two times or more to set the lever to the lowest position.



- After checking that the indicator needle is at the right edge, install the indicator as shown in the illustration.




- Check the operation of the indicator. If it does not operate correctly, re-install the indicator by while taking particular note of steps 3. and 4.

### Replacement of the shifting lever unit

Disassembly and reassembly should only be carried out when replacing the shifting lever unit.

- Loosen the cable fixing bolt (nut) of the front derailleur, and then pull the inner cable out of the shifting lever unit in the same way as when installing the inner cable.
- Carry out steps 1 - 2 for replacement of the indicator.
- Remove the three shifting lever mounting screws, and then remove the shifting lever unit as shown in the illustration.



Tightening torque :  
0.5 - 0.8 N·m {4 - 7 in. lbs.}

- To assemble, align the shifting lever unit and the brake lever bracket and then secure the shifting lever mounting screws.

- Carry out steps 3 - 4 for replacement of the indicator.

< Rear >

### Removal of the indicator


Disassembly and reassembly should only be carried out when replacing the indicator.

- Remove the two indicator set screws which are securing the indicator.


Tightening torque : 0.3 - 0.5 N·m {3 - 4 in. lbs.}

- Remove the indicator unit as shown in the illustration.

- Operate lever (B) at least eight times to set the lever to the highest position.



- After checking that the indicator needle is at the left edge, install the indicator as shown in the illustration.




- Check the operation of the indicator. If it does not operate correctly, re-install the indicator by while taking particular note of steps 3. and 4.

### Replacement of the shifting lever unit

Disassembly and reassembly should only be carried out when replacing the shifting lever unit.

- Loosen the cable fixing bolt (nut) of the rear derailleur, and then pull the inner cable out of the shifting lever unit in the same way as when installing the inner cable.
- Carry out steps 1 - 2 for replacement of the indicator.
- Remove the three shifting lever mounting screws, and then remove the shifting lever unit as shown in the illustration.



Tightening torque :  
0.5 - 0.8 N·m {4 - 7 in. lbs.}

- To assemble, align the shifting lever unit and the brake lever bracket and then secure the shifting lever mounting screws.

- Carry out steps 3 - 4 for replacement of the indicator.



### Installing the inner cable < Front >

Operate lever (B) two times or more, and check on the indicator that the lever is at the lowest position. Then remove the inner hole cover and connect the inner cable.

Tightening torque:  
5 - 7 N·m {44 - 60 in. lbs.}

Install the inner hole cover by turning it as shown in the illustration until it stops. Do not turn it any further than this, otherwise it may damage the screw thread.

Tightening torque :  
0.3 - 0.5 N·m {3 - 4 in. lbs.}



### Installing the inner cable < Rear >

Operate lever (B) eight times or more, and check on the indicator that the lever is at the highest position. Then remove the inner hole cover and connect the inner cable.

Tightening torque :  
5 - 7 N·m {44 - 60 in. lbs.}

Install the inner hole cover by turning it as shown in the illustration until it stops. Do not turn it any further than this, otherwise it may damage the screw thread.

Tightening torque :  
0.3 - 0.5 N·m {3 - 4 in. lbs.}

